

Invisido® 469 < Door grilles



Acoustic door grille for residential sector

Material

- Sound absorbing material: synthetic foam
- End caps: in Luran S ASA polymer (colourfast, weatherproof and UV-resistant)
- End caps: available in grey, black, cream or white; other colors available on demand

Dimensions

- maximum length: 2000 mm
- Standard length: 725 mm (type 730), 825 mm (type 830), 925 mm (type 930)
- Door thickness: 35 mm


Fixing

- Screws included

Typical applications

- No look-through
- Residential, aesthetical
- In combination with Renson system C⁺ and System C⁺EVO

Cross-sections

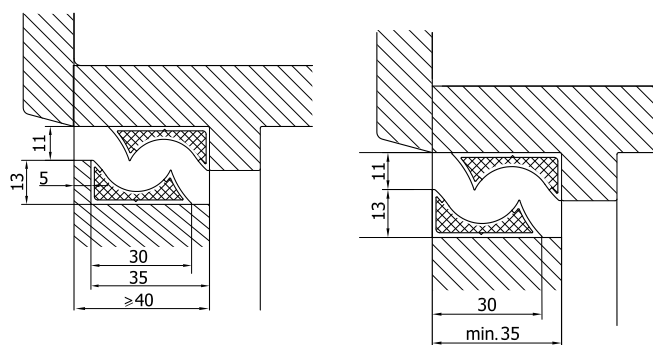

Technical specifications

Invisido® type 469				
Airflow		(EN 13141-1)		
Q at 1 Pa	17,6 m³/h (4,9 dm³/s)			
Q at 2 Pa	25,3 m³/h			
Q at 10 Pa	58,8 m³/h			
Q at 20 Pa	84,7 m³/h			
Comfort		(EN ISO 140-10, EN ISO 717-1)		
Sound reduction D _{n,e,w} (C;C _{tr})		28 (-1;0) dB		
Dimensions (L)	Natural	RAL 9010	RAL 9005	RAL 1015
725 mm	•	•	•	•
825 mm	•	•	•	•
925 mm	•	•	•	•