

C O M P A C T F L A P V E N T I L A T O R

TC60

- EXCELLENT PRICE/QUALITY RATIO
- THERMALLY BROKEN
- AVAILABLE IN ANODISED, SINGLE OR DUAL POWDER COATED
- FREE AREA OF 15000 MM²/M



TC60

INTRODUCTION

The RENSON TC60 is a thermally broken aluminium glazed-in window "flap" ventilator with soft-line design outer profile. The inside grille is punched and also acts as a bird mesh.

PRODUCT

Material

- Inside and outside profile: Aluminium Al Mg Si 0.5 to DIN1748, part 1
- Endcaps in ASA Polymer type Luran S: colourfast, weather resistant, durable and UV-resistant
- PVC thermal break and rubber glazing gasket

Product range

- Custom made or bar lengths


Finish

- Satin anodised
- Standard RAL or Syntha Pulvin Single colour
- Standard RAL or Syntha Pulvin Dual colour
- Standard colour end caps black and white (or coloured on request)

Dimensions

- Height: 75mm
- Glass reduction: 60mm
- Glass thickness: 20, 24, 28mm

Controls

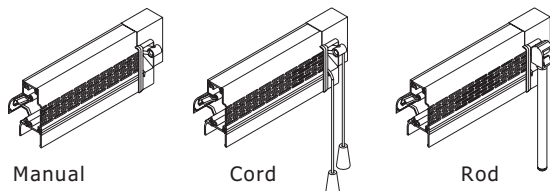

Maintenance



With a moist cloth or vacuum cleaner with brush, the ventilator can be cleaned easily.

TECHNICAL FEATURES

- Free Area: 15000 mm²/m
- Airflow: 63m³/h/m at 2Pa
- Water- & windtightness: 650 Pa according to BS6375 Part 1

ASSEMBLY INSTRUCTIONS

- Developed for fabrication from bar length
- Cut ventilator to size from a bar length, fix endcaps (1 left + 1 right)
- We advise use of glazing gasket RENSON Nr 039 (20-24-28 mm) for installation
- Maximum advised made to measure length: 2000 mm

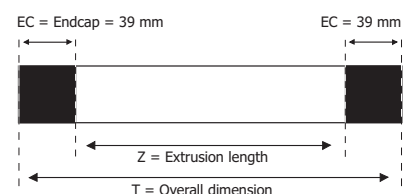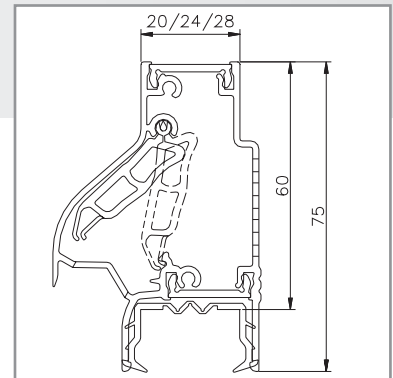

RENSON Ventilation • IZ 2 Vijverdam • Maalbeekstraat 10 • B-8790 Waregem
Tel. +32 (0)56 62 71 11 • Fax +32 (0)56 60 28 51 • info@renson.be • www.renson.net

RENSON Fabrications LTD (UK) • Fairfax Units 1-2-3 • Bircholt Road • Parkwood
Ind Est • Maidstone • Kent • ME15 9SF • Sales Tel. 01622/754123 • Fax
01622/689478 • Fax 01622/689479 • info@rensonuk.net • www.renson.net

Conditional technical changes

 **RENSON**
INNOVATION IN VENTILATION

L20075810_04/06